

Automatic chain
barriers for
passage widths
up to
16 m / 53 ft



Cat

**The chain barrier that
complies with the strictest
architectural requirements**

A high-technology product with perfectly harmonious design features.
Cat is highly useful in delimiting single and even double private and public parking spaces.



Cat 230V 24V

Automatic chain barriers

A unique, PATENTED Came project, which is widely used in delimiting single and even double private and public parking spaces.

A high-technology product designed to comply with the strictest architectural requirements. It is available in the 230V and 24V versions.



Perfect integration.

Thanks to its design, Cat is the ideal solution for selecting passages in historical centres and exclusive residential areas.



An additional service as well.

The chain barrier is the ideal solution to delimit parking areas in order to restrict their use to unauthorized personnel or outside of regular hours.



Looks and performance.

The Came chain barrier, is widely used in delimiting private areas.

Extremely versatile



Easy release.

During a blackout and in any emergency situation, the customized, key-operated safety padlock serves to immediately release the chain.

Complete automation.

The motor, control panel, radio receiver and all the features that guarantee functioning even during a power outage, are contained within the bollard.

A totally safe system.

The built-in control panel, provides low 24V voltage for the motor and all the accessories connected to the unit.

Global control of all access points.

Each Cat series automatic barrier may be connected to the various Came access control systems that make it possible to identify, memorize and clear the entrance or exit of authorised personnel only. The system can therefore be integrated with a global access control system, such as, for example, different departments within a company, or different services offered at collective venues, apartment blocks or commercial structures.



The 230V electronics

The Cat series is equipped with new generation command electronics that ensure total control of the automatic system, thus improving and augmenting the normal command and safety functions, such as:

- > **Mechanical endstops in the closing and opening phase.**
- > **Automatic closing beyond the set time** (adjustable with the trimmer).
- > **Maintained action command, by applying continual pressure of the command button for the entire duration of the opening/closing phase.**

The advantages of the 24V Cat

Whether it be streets, parking lots, collective venues or simply specific safety and functionality requirements of the system, Cat, with its 24V technology, can rise to meet the challenge. Here are the advantages

> **Frequent blackouts**

The electronics of the 24V Cat immediately detect any interruption in the power supply and activate the emergency functioning by using the back-up batteries.

> **Keep the speed under control**

Depending on your specific needs, the 24V electronics allow you to adjust the gate speed, according to your needs.

> **Total safety**


For total safety, all of the devices connected to the system are powered by low voltage.

> **Obstacle detection**

A special amperometric device, regulated by the control panel, electronically detects any obstacles and interrupts the motion of the chain.



Standard installation

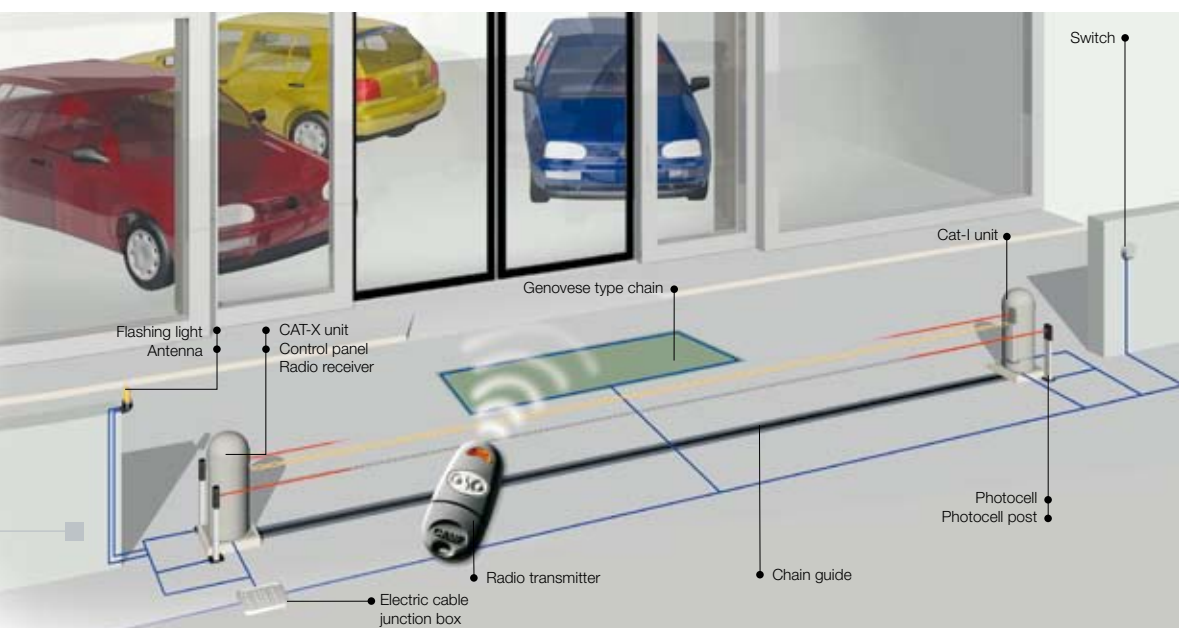

Made in Italy



For its quality processes management Came Cancelli Automatici is ISO 9001:2000 certified, and for its environmental management it is ISO 14001 certified. Came designs and manufactures entirely in Italy.

PRODUCTS



The range

230V A.C. chain barrier

CAT-X Bollard with built-in operator and control panel.

24V D.C. chain barrier

CAT-X24 Bollard with built-in operator and control panel.

Chain barrier bollard

CAT-I Bollard with counterweights and chain hooking.

Accessories

LB38 Card for connecting n. 3 12V-7Ah emergency batteries (for CAT-X24).

CAT-5 9 mm / 0.35 in genua-type chain for clearances up to 8 m / 26 ft.

CAT-15 5 mm / 0.19 in genua-type chain for clearances up to 16 m / 53 ft.

CAR-2 Floor-level chain-protection guide (length: 2 m / 6.56 ft).

CAR-4 Underground chain-protection guide (length: 2 m / 6.56 ft).


Technical features

Type	CAT-X	CAT-X24
Protection rating	IP54	IP54
Power supply (V) (50/60 Hz)	230 A.C.	230 A.C.
Motor power supply (V)	230 A.C. 50/60 Hz	24 D.C.
Current draw (A)	2,7	10 Max
Power (W)	300	240
Manoeuvre time (s)	11	9 ÷ 14
Duty cycle (%)	30	INTENSIVE USE
Traction force (Kg/lb)	50/110	50/110
Colour	CABINET Grey textured cod. 053 0837 - COVER RAL9006	
Operating temperature (°C/°F)	-20 - +55 / -4 - +131	
120V A.C.- 60 Hz PRODUCTS PLEASE CHECK OUR PRICE LIST		● 230V A.C. ● 24V D.C

Limits to use

Model	CAT-X	CAT-X24
Type of chain	Max width of passage clearance (m / ft)	Max width of passage clearance (m / ft)
Genovese 9 mm / 0.35 in	8 / 26	8 / 26
Genovese 5 mm / 0.19 in	16 / 53	16 / 53
		● 230V A.C. ● 24V D.C

Dimensions

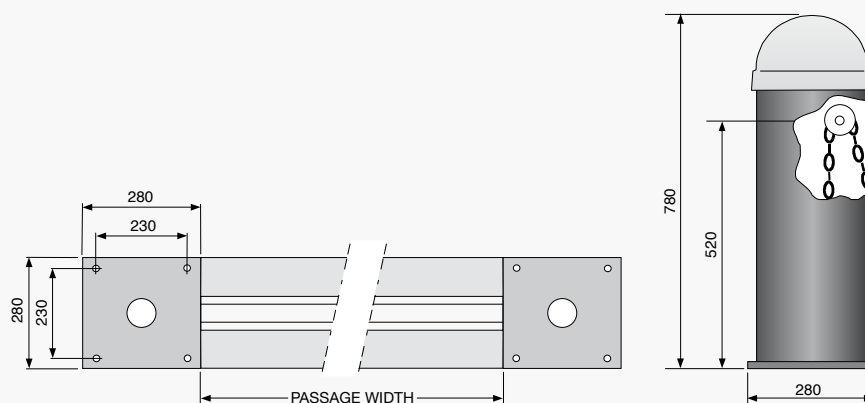

© Came KDEP#CEN07A3S10408 - 4/09

Came
cancelli automatici
S.p.A.

via Martiri della Libertà, 15
31030 Dosson di Casier
Treviso - ITALY
www.came.com - info@came.it

The data and information shown in this catalogue are subject to change without the obligation to give prior notice by Came cancelli automatici S.p.A.

